

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 22 TOWNSHIP 14 RANGE 4

DATE: 7-20-03 4-17-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 12-15-98

IN. S.P.C. E ZONE NAD '83

NAME: 14042207

N: 487234.6849(m)

E: 64283.7745(m)

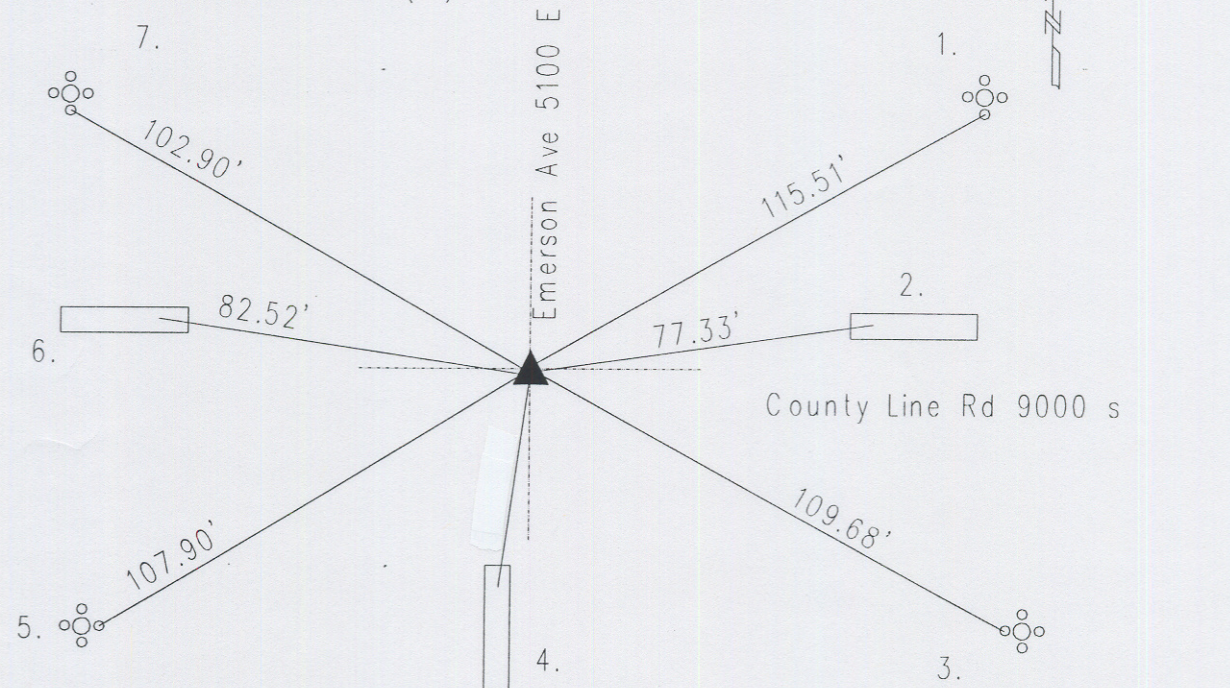

Original post set 1821 by Laughlin with witness: 8" ash N 59 E 18 links;
per Marion County Atlas pg. 9. Legal survey 11-17-1849 by Hosbrook called
corner, no reference, of stone. Witness: 10" ash N 39 E 44 links; 10" hickory
S 32 W 44 links. 2-2-44 called for stone. Other ties called railroad spike.
9-17-84 excavated by Green, stone, found 24" down. Set Harrison. Re-tied
Re-tied 10-20-90. Re-tied 10-14-94 per Kiste. Re-tied 7-20-03 by Wilcoxon.
14042207

REF.	DISTANCE	DESCRIPTION
1.	115.51'	Cut 'x' S-bolt aluminum pole base
2.	77.33'	Cut 'x' in median
3.	109.68'	Cut 'x' W-bolt aluminum pole base
4.	59.24'	Cut 'x' in median
5.	107.90'	Cut 'x' E-bolt aluminum pole base
6.	82.52'	Cut 'x' in median
7.	102.90'	Cut 'x' E-bolt aluminum pole base